

# QG series

## QG40N-series

QG40N-KIXv-360-AI-CM-UL

### Inclination sensor


1 axis vertical mounting

Programmable device

Output: 4 - 20 mA

Measuring range programmable  
between 1° and 360°

Measuring range  
Factory default:  $\pm 180^\circ$

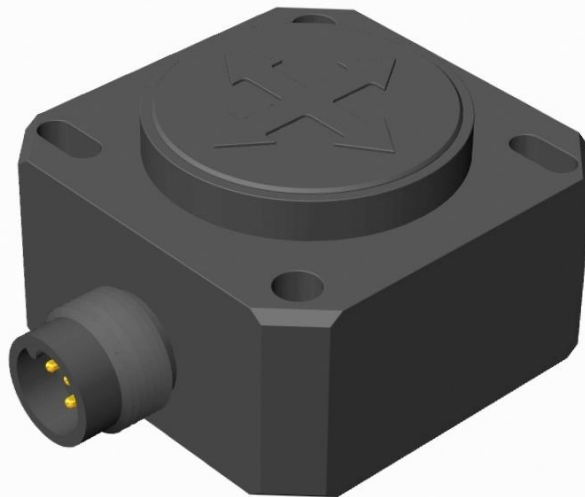


Housing
Dimensions (indicative)
Mounting
Ingress Protection (IEC 60529)
Relative humidity
Weight
Supply voltage
Polarity protection
Current consumption
Operating temperature
Storage temperature
Measuring range
Centering function
Frequency response (-3dB)
Accuracy (overall @20°C)
Offset error
Non linearity
Sensitivity error
Resolution
Temperature coefficient
Max mechanical shock
Output
Output load
Short circuit protection
Output refresh rate
Programming options

General specifications 11747B, v20241216	
Plastic injection molded housing (Arnite T06 202 PBT black)	
40x40x25 mm	
Included: 2x M3x25 mm zinc plated steel pozidrive pan head screws, self-tapping (PZ DIN 7500CZ)	
Mounting on flat surface only. Screw with care	
IP67, IP69K (with IP69K mating connector)	
0 - 95% (non condensing, housing fully potted)	
approx. 45 gram	
10 - 30 V dc	
Yes	
$\leq 15$ mA ( excluding output signal )	
-40 .. +80 °C	
-40 .. +85 °C	
Factory default: $\pm 180^\circ$	
Yes (12 mA = 0°), range 360°	
0 - 10 Hz	
0,5° typ.	
$\pm 0,2^\circ$ typ. after centering	
$\pm 0,4^\circ$ typ.	
not applicable. Repeatability 0,2°	
0,1°	
$\pm 0,04^\circ/\text{K}$ typ.	
10.000g	
4 - 20 mA	
$22 \text{ Ohm} \leq R_{\text{load}} \leq (50 \cdot V_s - 300) (\Omega)$ (Eg: $V_s = 24 \text{ V}$ : $R_{\text{load}} \leq 900 \Omega$ )	
Yes ( $T < 55^\circ\text{C}$ ), Max 10 s ( $T > 55^\circ\text{C}$ )	
20 ms	
by optional QG40N-configurator (measuring range, filtering)	

QG40N-KIXv-360-AI-CM-UL


Transfer characteristic

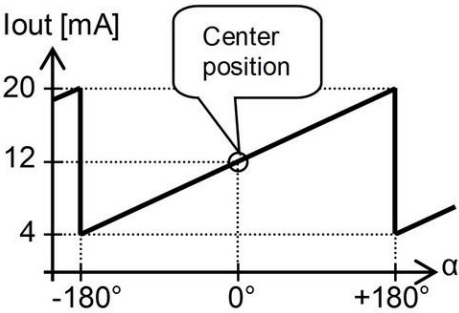

$I_{out} = 12 + 8 \cdot (\alpha / 180)$  [mA]

Centering: eliminate mech. offsets  
Connect center input to ground  
(>0,5sec) within 1 min. after power  
up. Normally the center input should  
be left unconnected.

Measurement orientation

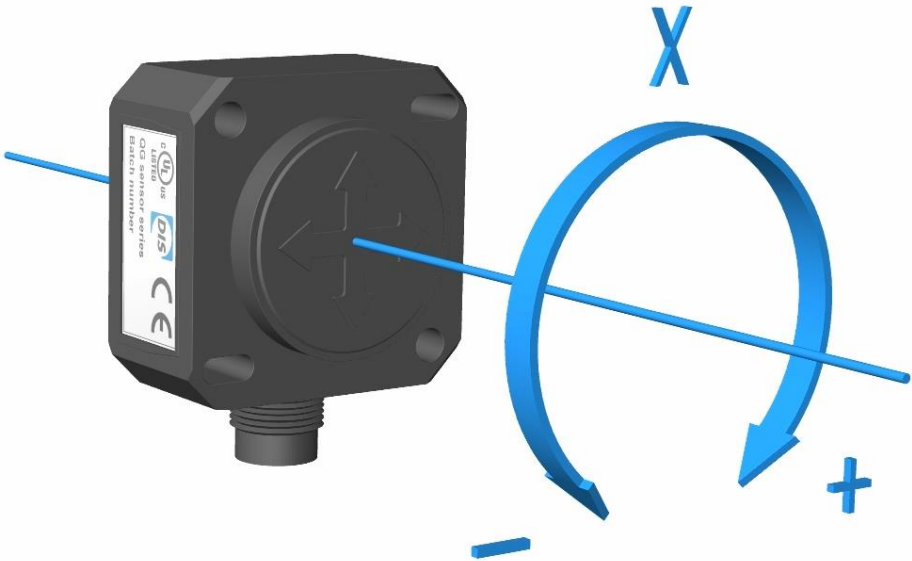


Rotation in vertical plane.

Lateral tilt sensitivity error:  
<  $\pm 0,03^\circ$  lateral tilt (typ.)  
Max. lateral tilt:  $45^\circ$

Connectivity (cable length  $\pm 10\%$ )

M12 5p male connector (Glass fibre reinforced grade, contacts CuZn pre-nickeled galv. Au)

- |        |                      |
|--------|----------------------|
| Pin 1: | + Supply Voltage     |
| Pin 2: | for factory use only |
| Pin 3: | Gnd                  |
| Pin 4: | output X             |
| Pin 5: | centering            |




If connected with M12 F (accessoire sold by DIS):

- |               |                      |
|---------------|----------------------|
| Brown:        | + Supply Voltage     |
| White:        | for factory use only |
| Blue:         | Gnd                  |
| Black:        | output X             |
| Green/yellow: | centering            |

Connection

Wire / pin coding

## Mechanical dimensions (indicative only)

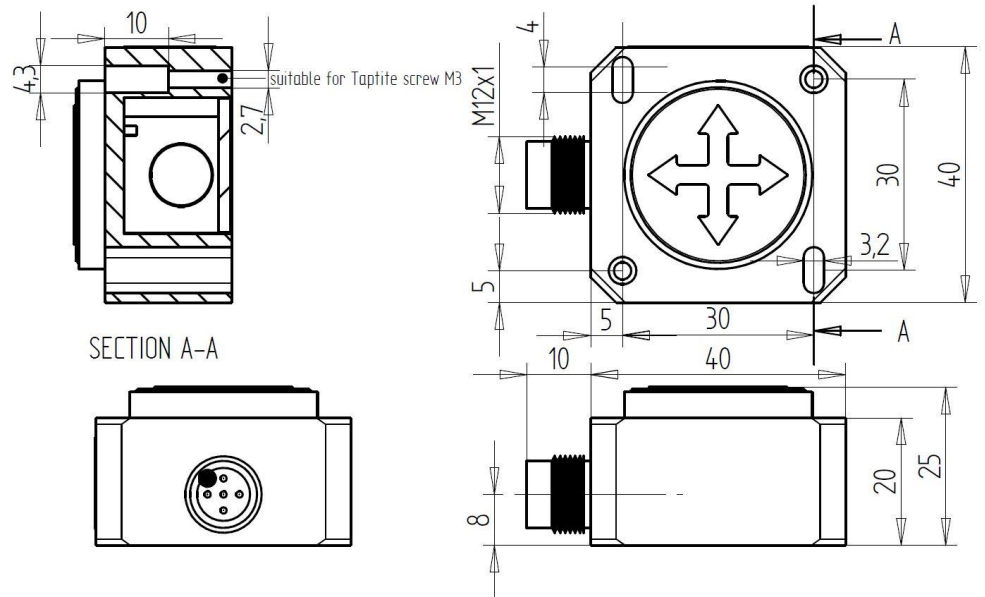

## Intended use, UL, Remarks

QG series sensors are intended to measure inclination/acceleration/tilt. Flawless function (acc. spec.) is ensured only when used within specifications. This device is not a safety component acc. to EU Machine Directive (ISO13849). For full redundancy two devices can be used. Modifications or non-approved use will result in loss of warranty and void any claims against the manufacturer.

UL & c-UL listed product (File number E312057, UL508 standards UL60947-5-2 & CSA-C22,2 No. 14)  
 Product Identity / Category Code Number (CCN): Industrial Control Equipment / NRKH & NRKH7  
 Enclosure rating: type 1, Ambient temperature: max 80 °C (see also datasheet, lowest value applies)  
 Electrical ratings: Intended to be used with a Class 2 power source in accordance with UL1310,  
 max. input Voltage 32V dc (see also datasheet, lowest value applies), max. current 200mA  
 Accessory Cable Assembly: Any UL-listed (CYJV/7) mating connector with mechanical locking, wire  
 thickness of at least 30 AWG (0,05 mm<sup>2</sup>), recommended ≤23 AWG (≥0,25 mm<sup>2</sup>)

As this device is accelerometer-based the sensor is inherent sensitive for accelerations/vibrations.  
 Application specific testing must be carried out to check whether this sensor will fulfil your requirements.