

QG series



SIL2 / PLd Certified sensor

QG76N-SAXYZ-8,0-CANS-C(F)M-UL-2d

Safety acceleration sensor

3 axis horizontal/vertical mounting
(RMS or Signed Peak value)

Programmable device

Interface: CANopen Safety

SIL CL 2 (acc. to IEC 62061)

PLd (acc. to EN ISO 13849)

Measuring range
 $\pm 8 \text{ g}$





General specifications v20241216

Housing	Stainless steel (AISI 316)
Dimensions (indicative)	70x60x33 mm
Mounting	Not Included: 4x M4x30 mm stainless steel (A4) Hexagon socket head screws
Ingress Protection (IEC 60529)	IP67, IP69K (with IP69K mating connector), (IP68 with optional cable gland)
Relative humidity	0 - 95% (non condensing, housing fully potted)
Weight	approx. 700 gram
Supply voltage	8 - 32 V dc SELV
Polarity protection	Yes
Current consumption	$\leq 25 \text{ mA}$ For CFM models (daisy-chained CANbus): max. current internal T-junction: 2.5A
Operating temperature	$-40 \dots +80 \text{ }^{\circ}\text{C}$
Storage temperature	$-40 \dots +85 \text{ }^{\circ}\text{C}$
Measuring range	$\pm 8 \text{ g}$
Centering function	Yes, 2 horizontal axes only, (CANout 0 = 0 g), range: $\pm 5^{\circ}$
Frequency response (-3dB)	0 - 1600 Hz
Accuracy (overall @20°C)	$\pm 1.5/4/8 \text{ g}$: overall 0,05/0,1/0,2 g typ.
Offset error	$\pm 20 \text{ mg typ. } (\pm 40 \text{ mg } 2\sigma)$ after zeroing
Non linearity	$\pm 0,04 \text{ g typ.}$
Sensitivity error	$\pm 2\% \text{ typ.}$
Resolution	16 mg
Temperature coefficient	$\pm 0,5 \text{ mg/K typ.}$
Max mechanical shock	10.000g
CAN interface (physical layer)	According to ISO 11898-1 & ISO 11898-2 (CAN 2.0 A/B), Short circuit protected
CANopen application layer and communication profile	CANopen Safety protocol: EN 50325-5, CANopen protocol: EN 50325-4 (CiA 301 v4.0 and 4.2.0)
Baud rate	125 kbit/s (default, range 10/20/50/100/125/250/500/800/1000 kbit/s)
Node ID	01h (default, range: 01h - 7Fh)
Event timer for TPDO1	50 ms (default, range 10-5000 ms)
Sync mode (TPDO's)	off (default, range on/off)
Heartbeat	off (default, range on/off)
Output format	Integer: -8000 to +8000 (SRDO:X=byte 2,1; Y=byte 4,3; Z=byte 6,5) (byte 7,8: integer 0)
SRDO1 COB-ID1	101h (default, range: FFh + 2x Node ID -> 101h-17Fh)
SRDO1 COB-ID2	102h (default, range: 100h + 2x Node ID -> 102h-180h)
Safeguard cycle time (SCT)	80ms(default, worst case 100ms)
Safety related validation time (SRVT)	20ms
Filtering	Output filter disabled. Default output mode: Signed Peak
Reaction on error	Emergency message 080h+Node-ID followed by NMT stop state (no CAN communication)
Boot time	$< 1 \text{ s}$
Programming options	by CANopen object dictionary (CAN parameters, filtering)

CANoutput = 1000*g

No clipping outside measuring range

Transfer characteristic

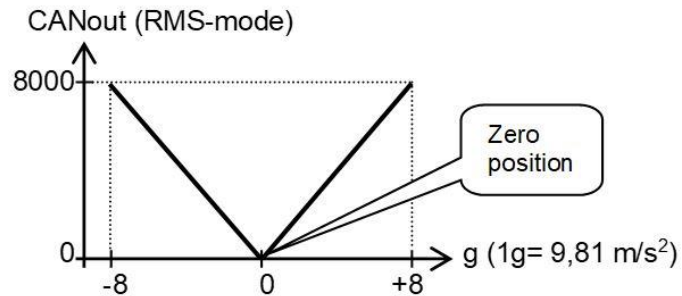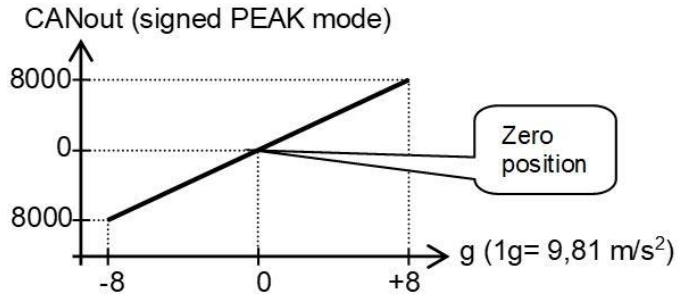


The default 0 g position is when the sensor is mounted horizontal or vertical and no acceleration is applied. The axis parallel to earth gravity will indicate 1 g, the two horizontal axes will indicate 0 g. The two horizontal axes can be zero-ed within $\pm 5^\circ$ tilt (by the CAN object dictionary) to eliminate mounting offsets.

The axis parallel to earth gravity cannot be zero-ed.

Optional the axis parallel to earth gravity can be compensated for 1 g gravity by the CAN object dictionary

Output value: Signed Peak (default) or RMS (selectable by CAN object dictionary)


Measurement orientation

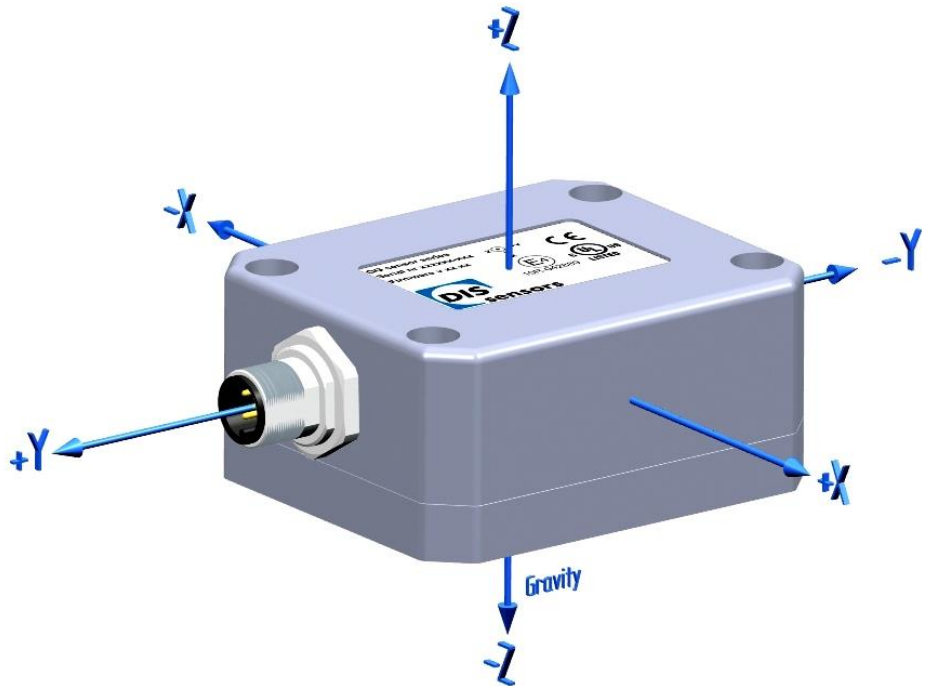

Connectivity (cable length $\pm 10\%$)

Male only or Male & Female (internal T-junction) M12 connector (5 pins, A-coding) (CiA303 V1.8.0) (stainless steel 1.4404 (316L), contacts copper alloy)
No bus termination inside. A CANbus always has to be terminated properly. For bus termination order separate M12 termination resistor (optional: T-connector)


Pin 1: Shield
Pin 2: Vcc
Pin 3: Gnd & CAN_GND
Pin 4: CAN_H
Pin 5: CAN_L



Connection

Wire / pin coding

Mechanical dimensions (indicative only)

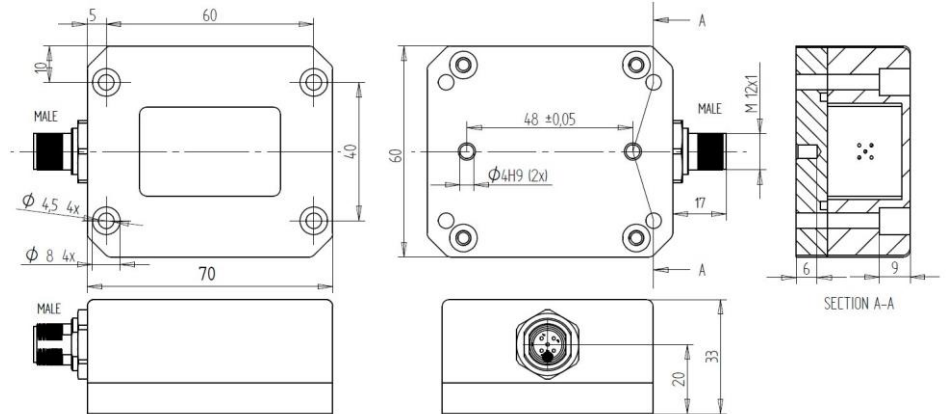

CAN-manual, EDS-file, UL, Safety information, Ordering codes

A CANopen-safety manual, EDS-files (CiA306 V1.3.0) and a Declaration of Conformity are available on www.dis-sensors.com/downloads

Safety information:

- this datasheet + relevant manual must be read and understood before using this safety device
- certified level: SIL CL 2 (acc. to IEC 62061), PLd (acc. to EN ISO 13849)
- EC type examination by DEKRA testing and Certification GmbH Certificate no. 4821024.21001
- Hardware architecture: HFT=1 (according IEC 62061, CAT.3 (according to EN ISO 13849)
- Standard (-40°C to +45°C): MTTFd: 447 year, DC: 93%, CCF: 70 pt, SFF: 98%, PFHd: 14E-09
- High Temp. (up to +85 °C): MTTFd: 73 year, DC: 93%, CCF: 70 pt, SFF: 98%, PFHd: 91E-09
- only a SELV power supply should be used
- Redundancy Compare Time (error if this time is expired): customer adjustable (default 2000ms)
- Redundancy Compare Acceleration (error if acceleration-difference > this value): customer adjustable (default 580mg)
- Redundancy error: Redundancy Compare Angle & Redundancy Compare Time exceeded
- Error: any detected error or a redundancy error
- Safety Related Fault Response Time (SRFRT): 100ms + Redundancy Compare Time (default 2000ms)

QG series sensors are intended to measure inclination/acceleration/tilt. Flawless function (acc. spec.) is ensured only when used within specifications. Modifications or non-approved use will result in loss of warranty and void any claims against the manufacturer.

UL & c-UL listed product (File number E312057, UL508 standards UL60947-5-2 & CSA-C22,2 No. 14)
 Product Identity / Category Code Number (CCN): Industrial Control Equipment / NRKH & NRKH7
 Enclosure rating: type 1, Ambient temperature: max 80 °C (see also datasheet, lowest value applies)
 Electrical ratings: Intended to be used with a Class 2 power source in accordance with UL1310, max. input Voltage 32V dc (see also datasheet, lowest value applies), max. current 200mA
 Accessory Cable Assembly: Any UL-listed (CYJV/7) mating connector with mechanical locking, wire thickness of at least 30 AWG (0,05 mm²), recommended ≤23 AWG (≥0,25 mm²)

This sensor is inherent sensitive for accelerations/vibrations.

Application specific testing must be carried out to check whether this sensor will fulfil your requirements.

Ordering codes:

M12 Male: QG76N-SAXYZ-8,0-CANS-CM-UL-2d

M12 Male & Female: QG76N-SAXYZ-8,0-CANS-CFM-UL-2d